

VALUE ADDED PRODUCTS FROM COCONUT OIL

Amit P. Pratap

Coconut is one of the ten most useful trees in the world, providing food for millions of people, especially in the tropics. Regardless of its origin, the coconut has spread across much of the tropics and coastal areas. The fruit is light (approx 1kg) and buoyant and presumably spread significant distances by marine current. India is one of the leading producers of coconut in the world.

Coconut oil consists of predominantly triglycerides with 86.5 per cent saturated fatty acids, 5.8 per cent monounsaturated fatty acids and 1.8 per cent polyunsaturated fatty acids. Due to its typical fatty acid profile and its resistance to high temperature, the oil has a long shelf life compared to other oils. However, unlike most oils, coconut oil will not be damaged by warmer temperature. Among the most stable of all vegetable oils, coconut oil is slow to oxidize and thus resistant to rancidity.

The medium-chain fats in coconut oil are similar to fats in mother's milk and have similar nutritional effects. These health effects were recognized centuries ago in Ayurvedic medicine. The knowledge of the aborigines of Nicobar Islands and the tribal population of other parts of India on the medicinal application of palm products is extensive. Even a transient account of ancient therapeutic applications of coconut palm products would be too extensive. Coconut oil nourishes the body and increases strength. The oil was and is also valued for its antimicrobial properties. The use of oil medicated with herbs is



Various Coconut Oil-based Cosmetics from Some APCC Member Countries

widespread among the people of India. Different preparations of coconut oil promote luxurious hair growth and protect the skin from bacterial, protozoal, and viral infections. For problems, such as lice, application of coconut oil medicated with the roots of coconut palm is known to be an effective treatment. In the past four decades, misinformation provided by certain politically biased agricultural groups and repeated in the professional and lay press have led people to believe all saturated fats are unhealthy. Little attention is focused on the fact that saturated fatty acids are not a single family of fats but comprises of three subgroups; short (C2-C6), medium (C8-C12), and long (C14-24) chain fatty acids. Each subgroup has different metabolic, biological and pharmacological functions. The medium chain fats are found exclusively in lauric oils. Therefore it is important understand the health benefits of medium chain saturated fats. Apart from its distinctive fatty

acid profile, the oil has a wide range of applications like cooking media, personal care, skin care, home care, soaps, detergents etc. In this article, specifications of some of the important chemical derived from coconut oil have been discussed.

Applications of native coconut oil in various fields

Tribology: It is the science of friction, wear and lubrication. The properties mentioned in Table 2 help in understanding the possible use of coconut oil in its native form for the purpose of lubrication. From the data it should be identified that the oil in its native form will have the limited use in the field of lubrication due to its high pour point. However, the characteristics like viscosity, flash point, copper corrosion and weld load are good enough for some of the applications in the lubrication field. In order to suit the oil for a particular application, the undesirable pour point (15°C) could be lowered by a suitable

Table 1. Fatty Acid Profile of the Refined Coconut Oil

Chain Length	Molecular Formula	Molecular Weight	Acid Value	Melting Point (°C)
6:0	C ₆ H ₁₂ O ₂	166	483.62	-4
8:0	C ₈ H ₁₆ O ₂	144	389.98	16
10:0	C ₁₀ H ₂₀ O ₂	172	326.16	32
12:0	C ₁₂ H ₂₄ O ₂	200	280.5	44
14:0	C ₁₄ H ₂₈ O ₂	228	246.06	56
16:0	C ₁₆ H ₃₂ O ₂	256	219.14	63
18:0	C ₁₈ H ₃₆ O ₂	284	197.53	69
18:1	C ₁₈ H ₃₄ O ₂	282	198.93	18
18:2	C ₁₈ H ₃₂ O ₂	280	200.35	-6
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

structural modification. The medium chain may find use in synthesizing newer class of lubricants of the desired range of

is increase in acid value, which reflects in lowering the flash point. (Table 3).

Use in Cosmetics: Cosmetics are not the reaction products and composed of a blend of several

ingredients to give the desired set of properties. Coconut oil is excellent as a skin moisturizer, with absence of adverse reactions. In India and Sri Lanka, coconut oil is commonly used for styling hair, and cooling or soothing the head.

IS: 7123-1973 Specifications for Hair Oil

Three types of hair oils are used,

Type 1: Based on vegetable oil/oils

Type 2: Based on mineral oil

Type 3: Based on a mixture of vegetable oil(s) – mineral oil emulsion

(Vegetable Oils: Castor oil, coconut oil, groundnut oil, sesame oil, mustard oil).

Oil along with color and perfume

Table 2 Tribological properties of coconut oil

Characteristics	Value
Flash point (°C)	263
Pour point (°C)	15
Viscosity at 40°C	31.2
Viscosity at 100°C	9.8402
Viscosity index	179.49
Copper Corrosion	1 (a)
Weld Load - Load in Pan (Kg)	11
- Actual (KgX15)	165
- Newton (kgX15X9.8)	1,617

properties.

Edible Oil: Coconut oil is commonly used in cooking, especially for frying, and it has a high smoke point temperature, which makes it good for this purpose. Coconut oil is used for making margarine, soap and cosmetics, soap and cosmetics. Hydrogenated or partially-hydrogenated coconut oil is often used in non-diary creamers and snack foods.

The requirement for specific gravity, refractive index, saponification value, iodine value and Polenske value are almost same for all grades. As the moisture content increases, there

Table 3: IS:542 - 1968 (Reaffirmed 1999) Specifications for coconut oil 3. Fatty Acid Profile of the Refined Coconut Oil

Characteristics	Requirements for Type						
	Expressed				Solvent Extracted		
	Refined grade	Grade 1A (Raw)	Grade 1B (Raw)	Grade 2 (Raw)	Refined grade	Semi refined	Grade 1Raw
Moisture and insoluble impurities (% by Wt. Max.)	0.1	0.25	0.25	0.25	0.1	0.25	1.0
Color (Lovibond Scale, 1" Cell, Y + 5R, Not deeper than)	2	4	11	30	2	10	30
Refractive index at 40°C				1.4480 to 1.4490			
Specific gravity at 30°C				0.915 to 0.920			
Saponification value(Min.)				250			
Iodine value(Wt%)s	7.5 to 10	7.5 to 10	7.5 to 10	7.5 to 10	7.5 to 10	7.5 to 10	8 to 13
Acid value (Max)	0.5	2	6	8	0.5	1	10
Unsaponifiable matter (% by Wt. Max.)	0.5	0.8	0.8	0.8	0.5	0.8	1
Polenske value (Min)	13	13	13	-	13	-	-
Flash point (°C)	-	-	-	-	225	100	90

should be packed in a well closed container.

Acid Value: Should not be more than 1.0

Peroxide Value: should not be more than 7.5 milliequivalents/1000 gm

Specifications and Utilization of Cocochemicals Derived from Coconut Oil

Glycerin: Glycerin is a byproduct of saponification reaction and fat splitting. The glycerin recovery is a significant factor in the economics of producing fatty acids and soaps from oils. The glycerin credit from biodiesel production has similarly increased the competitiveness of that renewable fuel. Applications for glycerin include diverse products like drugs and cosmetics, resins, polymers, and explosives. It has several commercial and industrial applications. The primary function of glycerin in many formulations is that of a humectant (a substance that retains moisture), as a carrier and emollient in cosmetics. It also acts as a solvent, sweetener, and preservative in food and beverages. Its properties as a plasticizer and biolubricant give it wide applicability for food processing machinery because of its nontoxic nature. It also finds application in the synthesis of alkyd resins are used in products like paints and inks where brittleness is undesirable.

Based on the method of production, crude glycerin has different specification as given in Table 5.

The ash content throws light on the metal content of the glycerin. Specifications for arsenic are stringent as it gets accumulated in the body and is toxic to human beings.

Table 4. IS: 11470 – 1985 (Reaffirmed 2006) Specifications for coconut oil for cosmetic industry

Characteristics	Requirements for	
	Type 1	Type 2
Moisture and insoluble impurities (% by Wt, Max.)	0.1	0.2
Color (Lovibond Scale, 1" Cell, Y + 5R, Not deeper than)	2	10
Refractive index at 40°C	1.4480 to 1.449	
Specific gravity at 30°C	0.915 to 0.920	
Saponification value (Min.)	250	
Iodine value (Wij's)	7.5 to 10	
Acid value (Max)	0.5	2
Unsaponifiable matter (% by Wt, Max.)	0.5	0.8
Polenske value (Min)	13	
Flash point (°C)	225	-
Test for rancidity	Shall be free from rancidity	

Specific gravity could be used as tool to know the purity of the product. The various metals come in the product depending on the quality of water used for saponification, fat splitting, the still in which the reaction, distillation and splitting is carried out.

Uses of Glycerin in Various Industrial Sectors

Food and beverages: Humectant vehicle, and emollient in toothpaste, skin creams and lotions, shaving preparations, deodorants, and make up.

Tobacco: Keeps tobacco moist and soft to prevent breaking and crumbling during processing; ensures freshness in packaged cigarettes and other tobacco products.

Surface coatings: Used in the

manufacture of alkyd resins, which are important component of surface coatings.

Paper and printing: Plasticizer, humectant, lubricant in the manufacture of paper, used with other ingredients in specialty treatments such as grease-proofing. Alkyd resins are important constituent of many printing inks.


Lubricants: Used due to its non-toxic character. It is used in lubricants for food and other machinery where product purity is essential.

Textile: Conditioning agent used widely in lubricating, sizing, and softening yarn and fabric. Lubricates many kinds of fibers in spinning, twist setting, knitting, and weaving operations.

Rubber and plastics: Lubricant and plasticizer for plastics.

Table 5. IS: 1796 – 1961 Specifications for crude glycerin

Characteristics	Requirements for	
	Soap Lye	Hydrolyser Grade
Glycerol (% by mass, Min)	80	88
Ash (% by mass, Max)	10	1.5
Non Volatile organic residue (% by mass, Max)	3	1.5
Arsenic as As (ppm, Max)	2	2
Total alkali (free and combined as Na ₂ O)	0.2	-

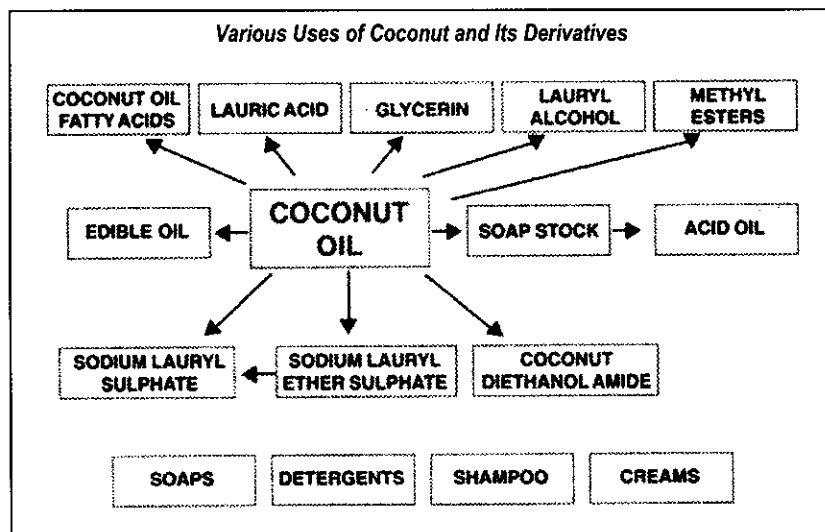

Urethane polymers: Fundamental chemical component of polyethers for urethane foams.

Nitration: Used to make nitroglycerin, which is the usual explosive in dynamite.

Table 6. IS: 1796 – 1961 Specifications for refined glycerin

Characteristics	Requirements			
	Analytical reagent	Industrial white	Technical	Dynamite grade
Glycerol (% by Weight, Min)	98	98	98	98
Specific Gravity at 30°C (Min)	1.2552	1.2552	1.2552	1.2552
Ash (% by Weight, Max)	0.01	0.01	0.05	0.025
Arsenic as As (ppm, Max)	1	-	-	-
Copper		To pass the test		
Iron as Fe (ppm, Max)	0.5	-	2	-
Lead as Pb (ppm, Max)	1	-	-	-
Chlorides as Cl (ppm, Max)	2	60	60	30
Suphate as SO ₄ (ppm, Max)	10	-	-	-
Acidity or Alkalinity (Max)	Nil	0.01	0.01	0.01
Colour (Y + R) not deeper than	0.5	1	2.5	5
	(in 5.25" Cell)	(in 5.25" Cell)	(in 5.25" Cell)	(in 5.25" Cell)

Electrical and electronics: Widely employed in manufacturing electrolytes for electronic condensers, which are used in radios and neon lights, and in processes for electro deposition and treatment of metals.

Coconut oil fatty acids: A range of fatty acids are derived from coconut oil from C8 to C18. The major fatty acids are lauric acid, myristic acid and palmitic acid. These fatty acids are produced by a process of saponification and acidulation, and continuous high pressure fat splitting. Glycerin is

Table 7. IS: 10931 – 1984 (Reaffirmed 2006) Specifications for lauric acid

Fatty acid	C ₈	C ₁₀	C ₁₂	C ₁₄	C ₁₆	C ₁₈	C _{18:1}	C _{18:2}
Percentage	1-2	3-4	50-56	14-18	8-10	1-2	8-11	1-2

obtained as a by-product of these reactions.

The fatty acids are further purified by fractional distillation to get the desired purity. The fatty acid profile of the distilled coconut fatty acids is summarized in Table 7.

Out of the several fatty acids present in coconut oil, lauric acid is the most important one and is extensively used as intermediate of many reactions. The lauric acid is converted to lauryl alcohol by high pressure hydrogenation using suitable catalyst and the product obtained is used in several formulations after derivatization such as soaps, shampoos, oral care products, personal care products, home care products, creams, and lotions. However the BIS specification is not available for lauryl alcohol.

Acid value, saponification value, titre and iodine value reflects on the purity of the lauric acid. Unsaponifiable matter specifies the presence of hydrocarbon, pigments, fatty alcohols, sterols, etc.

Myristic acid: Even though important, there is no BIS specifications available for myristic acid.

However, the products derived from isopropyl myristate is included in the list of BIS specifications. This product is extensively used as one of the ingredients of cosmetic creams. Isopropyl myristate is an ester prepared by reacting myristic acid with excess of isopropyl alcohol using acidic catalyst. The myristic acid is converted to myristyl alcohol.


Acid value of the final product defines the completion of esterification reaction. Saponification value, acid value, iodine value, titre of separated

Table 8. IS: 10931 – 1984 (Reaffirmed 2006) Specifications for lauric acid


Characteristics	Requirements		
	Grade 1	Grade 2	Grade 3
Lauric acid (% by Mass, Min.)	99	90	70
Moisture (% by Mass, Max.)	0.1	0.1	0.1
Saponification value	279-281	276-284	272-290
Acid value shall not differ from SV by more than	*4	4	4
Iodine value (Wij's)	0.1	0.5	1.0
Mineral acidity	Nil	Nil	Nil
Ash (% by mass, Max)	0.01	0.01	0.02
Unsaponifiable matter (% by Mass, Max)	0.1	0.1	0.2
Titre (°C)	43-44	39-44	35-43
Colour (51/4" Cell Y + 5R) Max	2	5	10

fatty acid reflect on the purity of the myristic acid taken for the reaction. Residue on ignition tells about the metal contaminants.


Fatty alcohols: These are derived from natural oils and fats and are straight chain, high

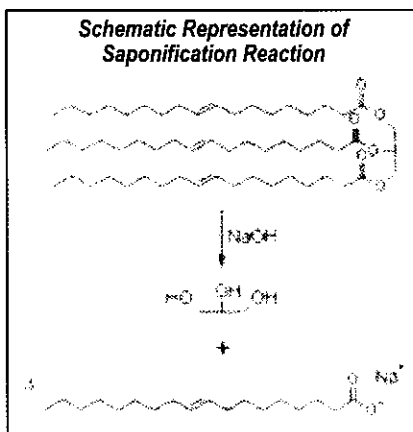

molecular weight primary alcohols. They include lauryl (C12), myristyl (C14), cetyl (C16), stearyl (C18), oleyl (C18, unsaturated) and so on. Fatty alcohols are emulsifiers and emollients to make skin smoother and prevalent moisture loss. Identical fatty esters are used to improve rub-about of formulas and to control viscosity and dispersion characteristics in cosmetics, personal care products and pharmaceutical ingredients. As chemical intermediates, the




primary use of fatty alcohols is as raw material for the production of fatty sulfate salts and alcohol ethoxylates for foaming and cleaning purposes in the field of detergent industry. Chemical




reactions of primary alcohols include esterifications, ethoxylation, sulfation, oxidation, and many other reactions.

Soap Stock: It is a by-product obtained in the refining step of coconut oil. The separate specification for coconut oil soap stock is not available. Soap stock is complex mixture of sodium salt of fatty acid, moisture, colour bodies, phospholipids, excess of alkali and neutral oil or triglyceride. It is a moist or wet, sticky and dark



colored mass. The general specification for soap stock is given in Table 10. The advantage is that this by-product of edible oil refining is less expensive than edible grade refined oils. The most effective methods involved is complete saponification of soap stock, followed by acidulation using methods

Structure of Lauryl Alcohol



similar to those which are presently employed in industry. This results in acid oil formation with a higher free fatty acid content, i.e. more than 50 per cent. These fatty acids are efficiently converted to methyl esters by acid-catalyzed esterification, resulting in a product that meet the accepted US specifications for biodiesel.

Total fatty matter represents the amount of fatty acids present. The amount of fatty matter is quite less due to the presence of many components. Oxidized fatty acids give the idea about the off odor associated with the product.

Acid Oil: Soap stock is an organic mass having sufficient quantity of moisture and hence is prone for the microbial and oxidative degradation. Therefore, it is not stored as such but converted to acid oil. Soap stock is boiled with excess of water and is acidified to yield the corresponding fatty acids. Acid oil is a mixture of neutral oil and substantial quantity of free fatty acids, hence the name acid oil. This product is generally dark colored. Now a days efforts are being made to produce the biodiesel from this cheaper source of fatty acid feed stock. Since the separate specification for the acid oil derived from coconut oil is not available a common specification applicable is given in Table 11.

The acid oil contains good amount of fatty matters as compared to soap stock and saves the transportation cost. The specification for the presence of mineral acidity are stringent as it leads to increase in acid value. Even the traces of mineral acidity can have the profound effect on the final acid value of the acid oil. Specs for iron are specified

Table 9. IS: 1356 – 1983 Isopropyl Myristate

Characteristics	Requirements
Acid Value (Max)	1.0
Titre of separated fatty acids (°C)	47 to 53
Saponification Value	190 to 220
Iodine Value (Max)	1.0
Arsenic (ppm, Max)	2
Heavy Metals (ppm, Max)	30
Specific gravity at 20°C	0.847 to 0.853
Residue on ignition (% by Mass, Max)	0.02

as it is a pro-oxidant and catalyses the oxidation reaction, while oxidized matter is responsible for off odor of the product.

Coconut Oil Methyl Ester: It is referred to as cocobiodiesel. The Philippines has launched the use of biodiesel, particularly, coconut

Table 10. IS: 12031 – 1986 (Reaffirmed 1998) Specifications for soap stock

Characteristics	Requirements
Total fatty matter (% by Mass, Min.)	7.0
pH Min	7.0
Unsaponifiable matter on TFM (% by Mass Max)	5.0
Oxidized fatty acids (% by Mass on TFM, Max)	5.0

methyl ester of CME, which is derived from coconut oil. Compared with other forms of biodiesels, the medium carbon chain of coco-biodiesel offers excellent lubricity, solvency and detergency. Coco-biodiesel cuts maintenance cost because of its superior lubricating and cleaning properties. It promotes better, more efficient combustion and less engine vibration because of its higher centane number and inherent oxygen content. It also boosts engine power and acceleration improves fuel economy by as much as 20 per cent, which means you get more mileage and big savings per liter. Separate specifications for coco-biodiesel are not available. The specifications of biodiesel in

general are summarized in Table 12.


Coco-Biodiesel results in better combustion, less pollution, and more engine power; the engines run smoothly and with longer maintenance intervals. It is renewable and biodegradable, being plant-based, lower emission of sulfur oxide, which is the main contributor to smog. It also significantly reduces serious air pollutants such as black smoke and air toxics that cause lung cancer, pulmonary tuberculosis, pneumonia, bronchitis and heart attack. It could establish a sustainable alternative domestic market for coconut oil and as a result, will stabilize the domestic coconut production, resulting in more income from copra, enhancing farm-based reintegration of opportunities.

Sodium lauryl sulphate: It is prepared by treating lauryl alcohol with sulfuric acid or oleum or sulfur trioxide and

subsequently neutralized by sodium hydroxide. It is commonly referred to as SLS or Sodium dodecyl sulfate (SDS or NaDS). The chemical formula is

$CH_3(CH_2)_{11}OSO_3Na$. It is an anionic surfactant, which is used as a foaming agent (to clean and make bubbles) in a large variety of used products. These include shampoos, soaps, face and body washes, toothpaste, laundry detergents and industrial cleansing chemicals such as engine degreasers. There are many derivatives of SLS that can

Structure of Sodium Lauryl Sulphate



be found in commercial preparations, including sodium laureth sulphate. Although these derivatives vary slightly in mildness, the general action and effects are essentially similar. A major concern about SLS is its effect, when used in combination with other chemicals or ingredients commonly found in personal care products. There are several other surfactants with similar names to SLS – in particular ammonium lauryl sulphate. Although these sound very similar, their molecular structure is significantly different and they do not have the same potential to irritate the skin. Also, because their molecules are larger than those of SLS, they are not able to pass through the skin


Table 11. IS: 12029 – 1986 Specification for Acid Oil

Characteristics	Requirements
Total fatty matter (% by Mass, Min)	95
Moisture and volatile matter content (% by Mass, Max)	4.0
Free fatty acid (% by Mass Min)	50
Free mineral acid (as H ₂ SO ₄ , % by Mass Max)	0.02
Unsaponifiable matter on TFM (% by Mass Max)	5.0
Oxidized fatty acids (% by Mass on TFM, Max)	305.0
Iron (ppm Max)	500
Ash (% by mass, Max)	0.25

Table 12 IS: Indian bio-diesel specification from Society of Indian Automobile Manufacturers

Characteristics (1)	Requirement (2)	Method of Test, ref to	
		Other methods (3)	[P:] of IS 1448 (4)
Density at 15	8600-900	ISO 3675	P:16/
		ISO 12185	P:32
		ASTM	
Kinematic viscosity at 40°C, cSt	2.5-6.0	ISO 3104	P:25
Flash point (PMCC) °C, min	120	P:21	
Sulphur, mg/kg max	50.0	ASTM D 5453	P:83
Carbon residue (Ramsbottom)*, by mass max	0.05	ASTM D 4530/ISO 10370	-
Sulfated ash, % by mass, max	0.02	ISO 6245	P:4
Water content, mg/kg, max	500	ASTM D 2709	P:40
		ISO 3733	
		ISO 6296	
Total contamination, mg/kg, max	24	EN 1262	-
Cu corrosion, 3 hrs at 50°C, max	1	ISO 2160	P:15
Cetane No., min	51	ISO 5156	P:9
Acid value, mg KOH/g, max	0.50	-	P:1/ Sec 1
Methanol @, % by mass, max	0.20	EN 14110	-
Ethanol, @@% by mass, max	0.20	-	-
Ester content, % by mass, min	96.5	EN 14110	-
Free glycerol, % by mass, max	0.02	-	-
Total glycerol, % by mass, max	0.25	EN 14103	-
Phosphorous, mg/kg, max	10.0	ASTM D 4951	-
Sodium & Potassium, mg/kg, max	To report	En 14108 &	-
	EN 14109		-
Calcium and Magnesium, mg/kg, max	To report	**	-
Iodine value	To report	EN 141404	-
Oxidation stability, at 110°C hrs, min	6	EN 14112	-

Carbon residue shall be run on 100 sample
 ** European method is under development
 @ Applicable for Fatty Acid Methyl Ester
 @@ Applicable for Fatty Acid Ethyl Ester

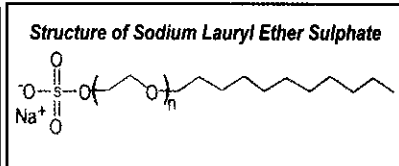

is heterogeneous, both in the length of the alkyl chain (12 being the mode of the number of carbon atoms), and in the number of ethoxyl groups, where n is the mean. n=3 is common in commercial products.

Ammonium Lauryl Sulfate (ALS):

The chemical formula is CH₃(CH₂)₁₀CH₂OSO₃NH₄, which is an anionic surfactant used in cosmetic formulations, with some shampoos containing up to 30 per cent ALS. It is most widely used in the USA. In Europe sodium laureth sulfate is used instead because ammonium lauryl sulfate gives off ammonia odor in alkaline pH. The lauryl sulfates are used because they are very high foamers but not "de-oil" as would the more common Dedecyl benzene sulfonates found in most US hand dishwashing compounds. Ammonium lauryl sulfate, like any other surfactant, makes a good base for cleansers as it disrupts the hydrogen bonding in water. Hydrogen bonding is the cause of "water tension". In solution, the lauryl sulfate molecules ionize, meaning that the ammonium or sodium separates from the rest of the molecule as a +1 ion. The rest of the molecule aligns itself with others like it and forms what is known as a micelle. The molecules align themselves in a sphere and the polar heads (the sulfate) on the surface of the sphere and the polar hydrophobic tails pointing inwards towards the center. The water molecules around the micelle arrange themselves around the polar heads, but disrupts their hydrogen bonding with the water surrounding them. The overall effect of having these miscelles in an aqueous (water) environment is that the water

and therefore cannot be absorbed into the body in the same way. Because of these differences, ammonium lauryl and laureth sulphates are considered to be milder and safer alternatives to SLS. Table 13 summarises the specifications for sodium lauryl sulphate.

Depending on the requirement of end application and type, the specification of sodium lauryl sulphate are available for 30 per cent to 94 per cent. Unsulphated fatty alcohol gives idea about the completion of reaction. Alkalinity tells about the presence of excess alkali.

Sodium lauryl ether sulphate:

Lauryl alcohol is ethxylated and the ethoxylated mass is reacted with sulfuric acid and the product obtained is neutralized with sodium hydroxide. It is used in many personal care products like soaps, liquid soaps and shampoo, bubble baths, bath and shower gels, toothpaste etc. due to its effective foaming property. Its chemical formula is CH₃(CH₂)₁₀CH₂(OCH₂CH₂)_nOSO₃Na. Sometimes the number represented by "n" is specified in the name, for example laureth-2 sulfate. The commercial product

Table 13. IS: 3986 (Reaffirmed 2005, Third Revision) Specifications for sodium lauryl sulphate

Characteristics	Requirements		
	Type 1	Type 2	Type 3
Sodium lauryl sulphate (% by Mass, Min.)	94	85	30
Unsulphated fatty alcohols (% by Mass, Max.)	1	2.5	1.1
Arsenic as (As ₂ O ₃) (ppm Max)	2	2	1
Heavy metals (as Pb) (ppm Max)	20	20	20
Sodium chloride (% by Mass, Max.)	1	1.5	1
Sodium sulphate (% by Mass, Max.)	2	6	4
Alkalinity	To Pass the Test		
pH (1% Solution)	7.05-10.5	7.5-10.5	7.5-11


becomes more able to penetrate things like cloth fibers or hair, and also becomes more readily available to solvate anything coming off before the mentioned substance.

Coconut diethanol amide: This product finds application as foam booster and is synthesized by reaction between coconut fatty acids and diethanol amine.

Free acidity tells about the extent of reaction. Total fatty acids give the total fatty matter present. Acid value of the separated fatty acids reflects on the authenticity of the raw material.

Cocamidopropyl Betaine: It is commonly referred as CAPB (N-(carboxy methyl)-N, N-Dimethyl-3-[-(Oxococonut) amino]-1-Propanaminium Hydroxide). Cocamidopropyl betaine is a derivate of cocamide and betaine. It is an amphoteric or zwitter ionic surfactant with a quaternary ammonium cation in its molecule that can act as an acid or a base. It is a viscous pale yellow transparent liquid and is used as a surfactant in personal care products like shampoos and hand soaps. In cosmetic formulations, it is used as an emulsifying agent, thickener and to reduce irritation, which purely ionic surfactants would cause. It

Structure of Cocoamido propyl betain



also serves as an antistatic agent in hair conditioners. It does not irritate the skin or mucous membranes. It has antibiotic effects, and is used in personal sanitary products. It has anti-static properties, making it a conditioning agent in shampoos.

It is compatible with other cationic, anionic, and nonionic surfactants. However, the BIS specifications are not available for coco amido propyl betaine.

General applications of the cocochemicals in various industrial segments

Personal Care: It is used in the form of fatty alcohol, fatty alcohol ethoxylates, quaternary ammonium salts, amine oxides, fatty amines and esters. These

chemicals perform various roles such as conditioners, thickeners, superfatting agents, emollients, viscosity builders, gelling agents, solubilisers, dispersant and emulsifiers. These products find use in several formulations like laundry powders, light and heavy duty dishwashing, wool washing, liquid detergents, fabric softeners etc.

Detergents: Fatty alcohol sulfates and alcohol ether sulfates (alcohol ethoxysulphates), alcohol ethoxylates, quaternary ammonium salts, fatty amines and amine oxide are used to perform functions like foam foam controller, emollient, apacifier, surfactants, softeners, wetting agents, dispersants, emulsifiers, softeners, foam stabilizers, etc. These chemicals are used in formulations like laundry powders, light and heavy duty dishwashing, wool washing, liquid detergents, fabric softeners etc.

Surface Cleaners: Cocochemicals in the form of alcohol sulfates, ether sulfates (ethoxysulfates), fatty amines, amine oxide, quaternary ammonium salts etc. are used for various roles as foam

Table 14. IS: 1187-1985 (Reaffirmed 2006) Specifications for sodium ether sulphate (30% solution)

Characteristics	Requirements
Active detergent (% by Mass, Min.)	27
Non detergent organic matter (% by Mass, Max.)	2.5
Sodium chlorine and sodium sulphate (% by Mass Max)	3.5
Cloud point (°C)	Less than 0
Viscosity (cP at 27°C)	1,500 to 5,000
Heavy metals (as Pb%) (ppm, Max.)	20
Arseni (As ₂ O ₃) (ppm, Max.)	2
pH (5% aqueous solution)	6 to 8
Iron (as Fe) (ppm, Max.)	20
Formalin (% by Mass Max)	0.04
1,4 Dioxine on 100% basis, (ppm, Max.)	100

Table 15. IS: 7101-1994 (Second Revision) Specifications for coconut diethanol amide

Characteristics	Requirements	
	Grade 1	Grade 2
Free fatty acid as Lauric Acid (% by Mass, Max.)	0.5	1
Direct titratable amine (as diethanolamine) % Mass, Min.)	9	18
Combined amine (as diethanolamine) % Mass, Min.)	31	20
Sulphated ash (% by Mass, Max.)	1	1
Moisture (% by Mass, Max.)	1	1
Total fatty acids (% by Mass, Min.)	62	43
Acid value of separated fatty acids	255 to 280	255 to 280
pH (10% solution)	9 to 10.5	-
Heavy metals (as Pb) (ppm Max)	20	20
Arsenic (as As) (ppm Max)	2	2

controllers, wetting agents, dispersants, surfactants, and germicidal disinfectants. These are used in the formulations such as floor, toilet, metal, bottle and scouring cleaners.

General Applications: Alcohol/ alcohol ethoxylates/ quaternary ammonium salts are used to perform particular function in several industrial applications given below.

Textile Chemicals: Uses as fabric softeners.

Leather Industry: Foam controlled and leveling agent.

Paper Industry: For control of surface tension, de-foaming and

de-inking applications.

Polymers: It is used as lubricant additives, polymerization auxiliaries, plasticizers, etc.


Metal Working Oils: It is used as rolling oils, hydraulic oils and anti-corrosion agents.

Water Treatment: As a bacteriostat.

Foods and Pharmaceuticals: Deodorant, depilatories, ointments, and emulsifiers.

Summary

Coconut oil is primarily used for edible purpose and as a hair oil. It is an important source of intermediates like fatty acids,

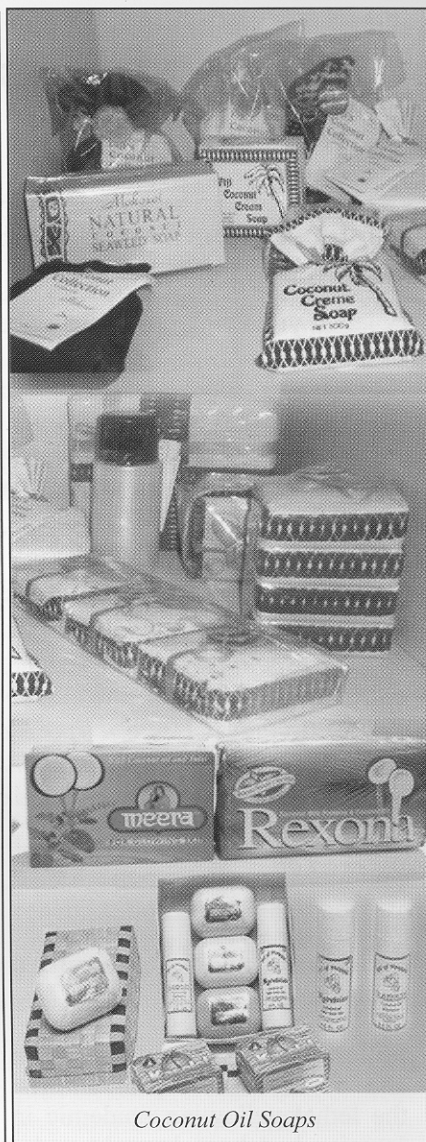

Coconut Oil Soaps

glycerol and fatty alcohols, which are used for the manufacture of wide range of chemicals such as surfactants, emulsifiers, foam boosters etc. These intermediates are used in the formulation of several finished products like soaps, detergents, and shampoos. Glycerol is used in a lot of cosmetics formulations. Palm kernel oil also has a similar fatty acid profile. It could be used for the manufacture of all the coco-based chemicals. However, the coco-based products are preferred due to their characteristics odor and mind set of the people.

This article is by Courtesy of the Coconut Development Board, India.

Coconut Oil Based Detergent

