

Special Issue: Plant Bioactive from the Palms and other Horticultural Crops

Optimization of ultrasound processing parameters for preservation of matured coconut water using a central composite design

Anjitha Jacob¹, I.P. Sudagar², R. Pandiselvam^{3*}, P. Rajkumar², M. Rajavel⁴

¹Department of Food Process Engineering, Agricultural Engineering College and Research Institute, Tamil Nadu Agricultural University, Coimbatore, Tamil Nadu, India; ²Department of Processing and Food Engineering, Agricultural Engineering College and Research Institute, Tamil Nadu Agricultural University, Kumulur, Tiruchirappalli District, Tamil Nadu, India; ³Physiology, Biochemistry & Post-Harvest Technology Division, ICAR-Central Plantation Crops Research Institute, Kasaragod, India; ⁴Department of Crop Physiology, Tamil Nadu Agricultural University, Coimbatore, Tamil Nadu, India

***Corresponding Author:** R. Pandiselvam, Physiology, Biochemistry & Post-Harvest Technology Division, ICAR-Central Plantation Crops Research Institute, Kasaragod, Kerala, India. Email: anbupandi1989@yahoo.co.in; r.pandiselvam@icar.gov.in

Received: 9 July 2022; Accepted: 29 August 2022; Published: 16 November 2022

© 2022 Codon Publications

OPEN ACCESS



ORIGINAL ARTICLE

Abstract

Mature coconut water (MCW) is a natural beverage and a main by-product of various coconut processing industries such as virgin coconut oil, coconut chips, coconut milk, etc. In spite of huge benefits, MCW's short shelf life limits its market potential. In this context, the present study investigates the effect of ultrasonic processing parameters, such as amplitude (50%, 60% and 70%) and time (5 min, 10 min and 15 min), on microbial population and quality profile (pH, total soluble solids, total sugars, reducing sugars and non-reducing sugars) of MCW. Central composite design was used to create a multiple linear regression model for each response and to optimize ultrasound processing parameters. The optimal treatment parameters to ensure microbial safety and preserve the nutritional quality of MCW were 60% ultrasonic amplitude and treatment time of 10 min. Total sugars, reducing sugars, non-reducing sugars and microbial load of MCW determined at optimized conditions were 4.92%, 2.804%, 2.13% and 4.79 log cfu/mL, respectively. Ultrasonic treatment was found to be effective in inhibiting microbial growth and maintaining non-reducing sugars of MCW.

Keywords: ultrasonic treatment, coconut water, central composite design, total sugar, microbial load

Introduction

Coconut water is found in the cavity of coconut, and its nutrients (Prithviraj *et al.*, 2021) and volume varies depending on nut maturity (Pandiselvam *et al.*, 2019). It takes 11–12 months for nuts to develop (Beegum *et al.*, 2022). Coconut water is mainly classified as tender coconut water (TCW) and mature coconut water (MCW). TCW is a natural and nutritious drink obtained from 6 to 7 months old matured fruit whereas coconut meat and MCW are main edible products obtained

from 12 months old matured fruit. MCW is a major by-product of coconut meat processing industries such as desiccated coconut powder, coconut milk powder, coconut chips and virgin coconut oil. MCW possesses sugars and functional electrolytes that are beneficial for health (Sunil *et al.*, 2020; Yong *et al.*, 2009). A single matured coconut contains an average of 50–250 mL of coconut water (Beegum *et al.*, 2018). In India, the annual coconut production in 2016–2017 from an area of 2.08 million ha was 23.90 billion nuts (Subramanian *et al.*, 2018). A large volume of coconut water left unutilized during copra and

coconut meat processing is estimated at 2.4-billion liters, which is not only wasted annually but also contributes to environmental pollution (Chauhan *et al.*, 2014).

Food science researchers have attempted to develop various value-added products, such as vinegar, squash, jelly, flavored drink, sparkling wine, coconut champagne and coconut water concentrates, from MCW. However, the nutritional profile, microbial safety and potential market price of these products depend on the initial quality of MCW. The traditional method used for collecting MCW spoils it within a day because of the proliferation of bacteria, such as *Escherichia coli*, which could be as high as 10^6 cfu/mL (Balter *et al.*, 2005). Exposure to air affects coconut water's sensory and nutritional qualities (Duarte *et al.*, 2002). A new and potential strategy is required to improve the shelf life of MCW and preserve its natural freshness, flavor and aroma.

Coconut water available in the market is treated with high temperature and short-time thermal process. Thermally processed coconut water by adding biopreservatives has extended shelf life, but it creates a negative impact on sensory attributes and quality profile (Haseena *et al.*, 2010; Pandiselvam *et al.*, 2022). Thermal processing is effective in inactivating enzymes and providing an antimicrobial effect (Atalar *et al.*, 2019); however, the use of nonthermal technology is gaining more prominence for preserving natural beverages without affecting their original quality (Prithviraj *et al.*, 2021).

Several novel nonthermal technologies, such as cold plasma (Dong *et al.*, 2021; Gavahian *et al.*, 2020), ultraviolet light, ozone, pulsed light (PL), ultrasound, pulsed electric fields, high-pressure processing (HPP), high-pressure homogenization, ionizing radiation, and ozone (Kongruang and Kleesuwat, 2020), have been tried for extending the shelf life of fruit juices. Choosing an appropriate processing technique must be considered keeping in view the biological and chemical safety of final products (Mousavi Khaneghah, 2021). In recent years, ultrasound (US) technology has gained attention because of its safety and ability to maintain the original flavor of food (Jiang *et al.*, 2020). The cavitation effect of ultrasound results from the generation, growth and implosion of tiny bubbles (Ercan and Soysal, 2011). Cao *et al.* (2019) showed that ultrasound treatment at intensity of less than 450 W/cm^2 within 8 min was effective in maintaining the quality of bayberry juice.

Optimization in food processing entails determining the best quality criteria (product and process efficiency) while saving time and money (Baş and Boyacı, 2007; Sevda *et al.*, 2012; Witek-Krowiak *et al.*, 2014). Achieving optimum conditions requires evaluating interactions and effects of different factors, and this can be done only

through experimental studies. In conventional optimization, the one-factor-at-a-time approach is used to optimize multivariable system. Use of conventional methods requires different experiments, and it does not represent the combined effect (Behera *et al.*, 2018). Response Surface Methodology (RSM) is the most widely used experimental design because of its minimal number of experiments and fast experimental speed (Nwabueze, 2010; Xu *et al.*, 2022). The central composite design (CCD) model is a key component of RSM and is more accurate and requires no three-level factorial experiment to build a second-order quadratic model.

To our knowledge, no study is available on the application of ultrasound treatment for the preservation of MCW. Also, no optimization has been conducted for the ultrasonic treatment of MCW. In this context, the present study aims to optimize the process parameters of ultrasound treatment to preserve the physicochemical quality of MCW and ensure its microbial safety.

Materials and methods

Raw material

Mature coconuts (Ver. West Coast tall), aged 11–12 months, were obtained from the coconut nursery of Tamil Nadu Agricultural University, Coimbatore, India. Damage-free sound coconuts were selected for the extraction of water.

Collection of coconut water

Dehusked coconuts were split into two halves by using stainless steel cutter and the water was collected in a stainless steel container after filtering through a muslin cloth. Treatments were carried out immediately after collecting MCW to maintain quality of the product.

Ultrasonic treatment

Mature coconut water (80 mL) was taken in a 100-mL sterile glass beaker for ultrasonic treatment. A 20-kHz, 230-volt ultrasonic processor (VCX1500; Sonics and Materials Inc., Newtown, CT, USA), as shown in Figure 1, was operated at 1,500 W. A 25-mm diameter probe was immersed (about 2 cm) in the center point of the sample container. Ultrasonication was carried out at amplitudes of 50%, 60% and 70% at 28°C. A thermocouple was inserted in MCW to measure and maintain constant temperature throughout the experiment. Treatment periods (5, 10 and 15 min) were studied with 5-s on and 5-s off pulse cycle. As shown in Figure 1, MCW was constantly

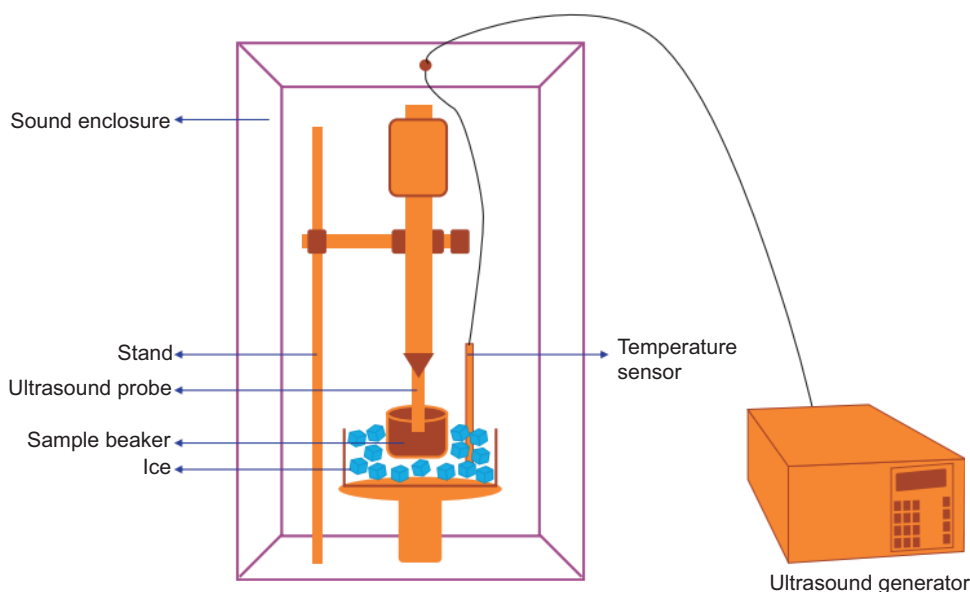


Figure 1. Experimental setup for ultrasonic treatment.

cooled to maintain a temperature of 28°C by immersing the sample glass beaker in an ice bath during the process of ultrasonication.

Method of analysis

Determination of pH and total soluble solids

The pH and TSS values of MCW were measured using a digital pH meter (accuracy: ± 0.1 pH brand: Enric, Ahmedabad, India) and refractometer (Erma Inc., Tokyo Japan), respectively.

Determination of total sugars, reducing sugars and non-reducing sugars

Amount of total sugar in MCW was determined by using Dubois *et al.*'s (1956) procedure. The reducing sugar content of MCW was determined using the Nelson–Somogyi method as described by Ranganna (1986). The amount of non-reducing sugar was calculated using the following formula: Non-reducing sugar (%) = total sugar (%) – reducing sugar (%).

Determination of microbial load

The microbiological analysis of MCW was carried out by the total plate count method. The serially diluted samples were enumerated using the pour plate method. Duplicate diluted samples were poured onto plate count agar, and incubated for 24–48 h at room temperature for detecting microbial load (Purkayastha *et al.*, 2012).

Response surface methodology experiments

Response surface methodology (RSM) was employed to establish the optimum conditions of ultrasonic amplitude and treatment period for retention of non-reducing sugars and microbial stability of MCW. Design expert software was used to analyze data and construct models (version 13.0.5.0, Stat-Ease Inc., Minneapolis, MN, USA). Two-factor, three-level CCD was used to develop multi-regression models. Table 1 highlights the range and center point values for two independent variables, namely ultrasonic amplitude and treatment period. In CCD, effect of each independent variable, and interaction between independent variables were investigated and reported.

Results and Discussion

Model fitting

Response surfaces were used to determine the best model to demonstrate the influence of independent variables on dependent variables (Aydaret *et al.*, 2018). Table 2 shows the significant effect of independent variables (ultrasound amplitude [%] and sonication time [min]) on quality profile (pH, TSS, total sugars, reducing sugars

Table 1. Independent variables and their level used for central composite design.

Independent variables	Coded levels				
	– α	–1	0	+1	+ α
Amplitude (A)	45.8579	50	60	70	74.1421
Time (B)	2.92893	5	10	15	17.0711

Table 2. Ultrasound-based experimental design used for preservation of mature coconut water.

Run	Independent variables		Dependent variables					
	Ultrasound exposure time (min)	Ultrasound amplitude (%)	pH	TSS (Bx)	Total sugars (%)	Reducing sugars (%)	Non-reducing sugars (%)	Microbial load (log cfu/mL)
1	5	50	5.3	5	4.80	2.56	2.24	5.32
2	5	70	5.3	5	4.96	2.96	2.00	4.92
3	15	50	5.3	5	4.68	2.63	2.05	4.90
4	15	70	5.3	5	4.78	3.04	1.74	4.70
5	10	45.8579	5.3	5	4.76	2.58	2.18	5.12
6	10	74.1421	5.3	5	4.85	3.01	1.84	4.78
7	2.92893	60	5.3	5	5.01	2.86	2.15	5.19
8	17.0711	60	5.3	5	4.82	2.86	1.96	4.73
9	10	60	5.3	5	4.96	2.82	2.14	4.72
10	10	60	5.3	5	4.90	2.70	2.20	4.79
11	10	60	5.3	5	4.92	2.82	2.10	4.82
12	10	60	5.3	5	4.89	2.78	2.11	4.82
13	10	60	5.3	5	4.93	2.83	2.10	4.84
	Control		5.3	5	5.12	2.40	2.72	6.92

and non-reducing sugars) and microbial populations. Experimental design for the optimization of ultrasonic process parameters was chosen based on a previous study (Vivek *et al.*, 2016). From the experimental data, coefficients of polynomial equation were calculated to predict responses. The results of 13 sets of experiments were analyzed and the interpretation was provided. F-value, *P*-value and significance of each variable on performance parameters of ultrasound treatment on dependent parameters are given in Table 3. Results of statistical analysis (ANOVA) revealed that the experimental data could be represented well with a linear and second-quadratic polynomial model, with coefficient of determination (R^2) values for total sugars, reducing sugars, non-reducing sugars and microbial load being 0.8938, 0.9036, 0.9476 and 0.9764, respectively. The proximity to unity R^2 in our study shows that the influence of ultrasound amplitude and ultrasound exposure time on response variables could be adequately described by linear and quadratic polynomial models. The results suggested that the regression model could fit dependent variables, namely total sugars, reducing sugars, non-reducing sugars and microbial load values, considerably, and the error analysis indicated that the lack of fit was insignificant for these dependent variables.

Response surface analysis

Effect of ultrasonic treatment on pH and total soluble solids of mature coconut water

The pH and TSS values of fresh and processed samples did not differ significantly (Table 2). Similar results were

reported for grape juice by Aadil *et al.* (2013) that its pH did not change with ultrasonication (at processing conditions of 28-kHz frequency and temperature of 20°C) for 60 and 90 min. Furthermore, Saeeduddin *et al.* (2015) found that pears treated at processing conditions of 20-kHz frequency and 70% amplitude showed no significant changes in TSS and pH. A nonsignificant change in the pH of lime juice was observed after treating it for 60 and 90 min (Bhat *et al.*, 2011) at a processing condition of 25-kHz frequency at 20°C. Also, no significant changes in pH were observed in apple juice (Kenari and Belgheisi, 2019) treated with an ultrasonic bath (for 15–60 min at 40°C and 60°C temperatures) and ultrasonic probe (for 10–20 min at 40°C and 60°C temperatures), and in tomato juice (Starek *et al.*, 2021) at ultrasound intensity of 28 W cm⁻² and 40 W cm⁻² and frequency of 20 kHz.

Effect of ultrasonic treatment on total sugars and reducing sugars of matured coconut water

The plot of total sugars and reducing sugars as affected by ultrasonic amplitude and treatment time is shown in Figure 2. Upon sonication, a slight reduction was observed in total sugars. Yuan *et al.* (2009) also reported of having decreased total sugars in apple juice treated with an ultrasonic frequency of 20–24 kHz and an ultrasonic power of 60–900 W. Although reduction in browning after ultrasound treatment could be attributed to a decrease in sugar content, a slight reduction was observed in total sugars despite no significant change in TSS. However, the reducing sugar contents of MCW showed an increasing trend upon sonication and this could be due to high shear force upon cavitation

Table 3. F-values, P-values and significance of each variable on performance parameters of ultrasound treatment on dependent parameters.

	Total sugars		Reducing sugars		Non-reducing sugars		Microbial load	
	F-value	P-value	F-value	P-value	F-value	P-value	F-value	P-value
A	11.54	0.0115	92.71	<0.0001	70.67	<0.0001	95.36	<0.0001
B	24.8	0.0016	1.04	0.3325	34.35	0.0006	135.96	<0.0001
AB	0.5539	0.4810	-	-	0.6518	0.4460	0.6518	0.0378
A ²	21.73	0.0023	-	-	16.24	0.0050	16.24	0.0012
B ²	1.13	0.3230	-	-	7.08	0.0324	7.08	0.0009
Lack of fit	3.72	0.1183	0.8917	0.5722	1.10	0.4453	0.2761	0.8406
R ²	0.8938		0.9036		0.9476		0.9764	
Adj. R ²	0.8180		0.8843		0.9102		0.9595	

which resulted in the release of entrapped sugar molecules from the cell wall and membrane structure of MCW (Cruz-Cansino *et al.*, 2016; Zou and Jiang, 2016). Owing to the mechanical action of ultrasound, solvent's penetration power also increased, which eventually increased the diffusion process from material to solvent (Rostagno *et al.*, 2003). This could be due to the hydrolysis of non-reducing sugars into reducing sugars during ultrasound process. Increase in the percentage of reducing sugars of MCW upon sonication was in agreement with the results of previous studies which reported that sonication increased the contents of reducing sugars in carrot juice (Jabbar *et al.*, 2014), melon juice (Fonteles *et al.*, 2012) and apple juice (Abid *et al.*, 2014).

According to the results, the error analysis indicated that the lack of fit was not significant for reducing sugars and total sugars. The polynomial regression equations for reducing sugars and total sugars are given as under:

$$\text{Reducing sugars} = 1.70276 + 0.0177264 \times A + 0.00375 \times B;$$

$$\text{Total sugars} = 1.96172 + 0.093341 \times A + 0.0167825 \times B - 0.0003 \times AB + -0.0007125 \times A^2 - 0.00065 \times B^2,$$

where A is the amplitude and B is the time.

Effect of ultrasonic treatment on non-reducing sugars of matured coconut water

Sugars in coconut water are an important source of ergogenic aid, since it is the main source of energy for humans (Kailaku *et al.*, 2015). In sugars, non-reducing sugar is one of the important quality parameters of MCW that distinguishes young coconut water from MCW (Burns *et al.*, 2020). The response surface plot of the effect of ultrasonic

amplitude and treatment time on non-reducing sugars demonstrates a significant decrease in non-reducing sugars with an increase in ultrasonic amplitude and treatment time (Figure 2). This could be due to the hydrolysis of sucrose (non-reducing sugars) into fructose and glucose after sonication (de Souza Soares *et al.*, 2019). Fonteles *et al.* (2012) reported that ultrasound-treated cantaloupe melon juice showed an increase in the content of reducing sugars. Samples treated at 60% amplitude for 10 min were found to have optimum content of non-reducing sugars. In the early stages of coconut maturation, almost all sugars, such as glucose and fructose (over 75%), are reducing sugars, but in their later stages (mature coconut), non-reducing sugars (sucrose) become more prominent (Jackson *et al.*, 2004). Therefore, in the case of MCW, retention of non-reducing sugars is considered. Even though maximum non-reducing sugars were retained at low amplitude and time (50% amplitude and 5-min time), this did not bring about the expected reduction in microbial load. Hence, by considering quality parameters and microbial load, the samples treated at 60% amplitude for 10 min were found to be optimum. Ultrasonic amplitude and treatment time had a significant ($P < 0.05$) effect on the non-reducing sugars of MCW ($R^2 = 0.9476$, and $CV = 2.10$), which indicated that the quadratic model fits considerably (Table 3).

The polynomial regression equation for non-reducing sugars is as follows:

$$\text{Non-reducing sugars} = 0.3128 + 0.0701146 \times A + 0.0380325 \times B - 0.00035 \times AB - 0.0006625 \times A^2 + -0.00175 \times B^2,$$

where A is the amplitude and B is the time.

Effect of ultrasonic treatment on microbial load of matured coconut water

Ultrasound destroys microorganisms by releasing energy from acoustic phenomenon (Hashemi Moosavi *et al.*, 2021).

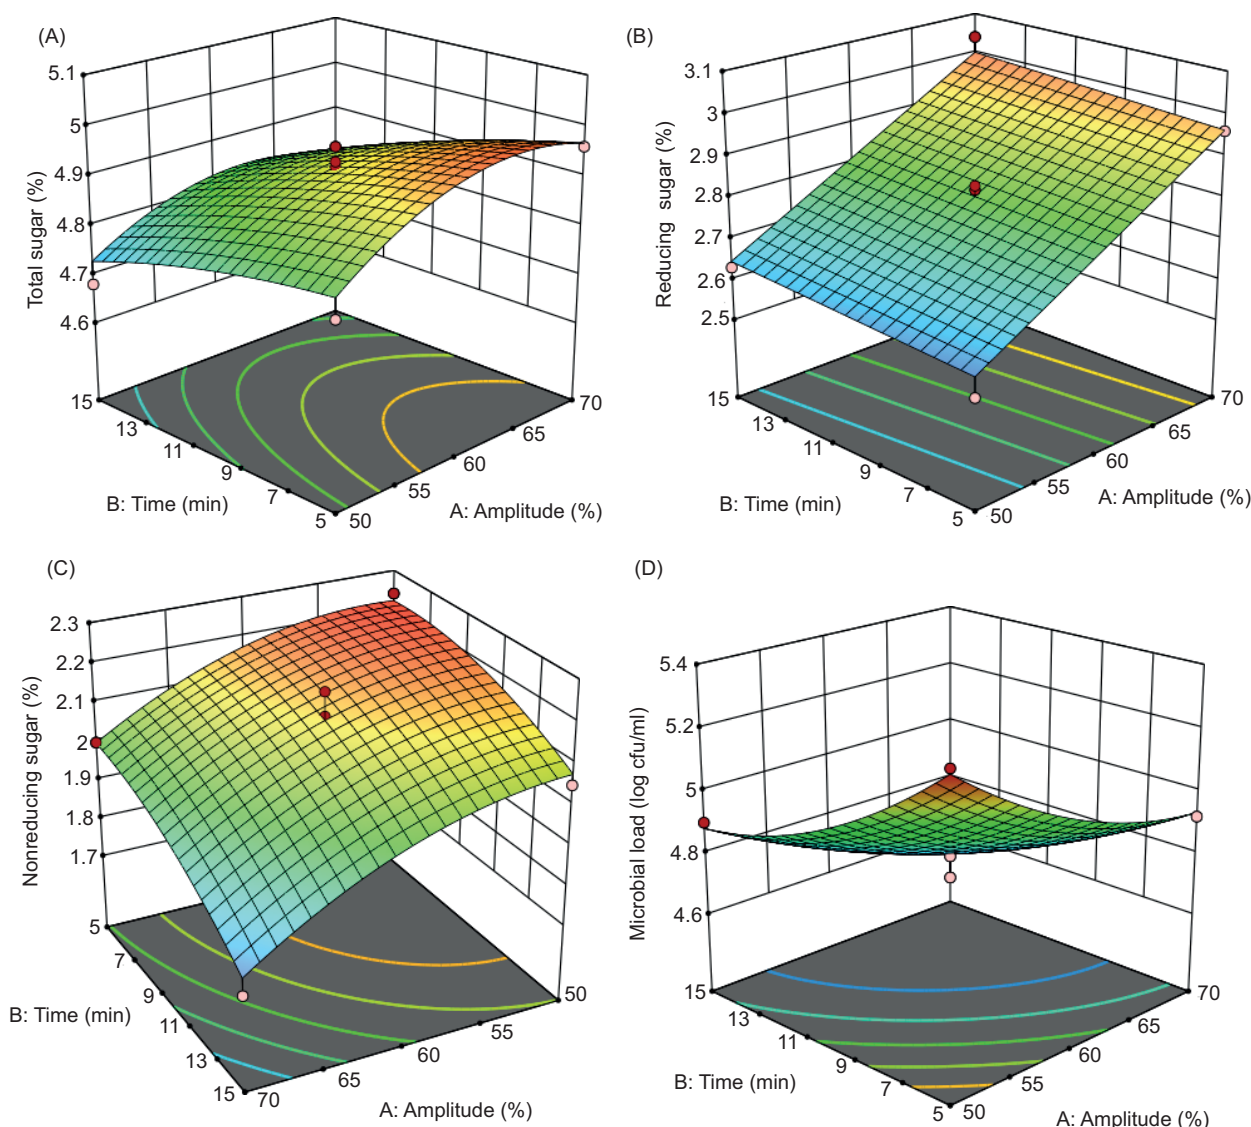


Figure 2. Effect of ultrasonic amplitude and treatment time on (A) total sugars, (B) reducing sugars, (C) non-reducing sugars and (D) microbial load of MCW.

The plot of microbial load as affected by ultrasonic amplitude and treatment time is given in Figure 2. Use of ultrasonic treatment significantly ($P < 0.05$) reduced the growth of microbial population. Independent variables (ultrasonic amplitude and treatment time) showed a significant reduction in microbial load ($R^2 = 0.9764$, and $CV = 0.7992$). It was observed that microbial load decreases with an increase in ultrasonic amplitude and treatment time. Maximum reduction in microbial load was observed at 70% amplitude and 15-min treatment time, and minimum reduction in microbial load was observed at 50% amplitude and 5-min treatment time. It could be probably due to increased permeability of membranes and DNA damage via free radical production because of acoustic cavitation (Pratheepa and Kamalanathan *et al.*, 2020). In comparison with the control sample, the total number of

microorganisms was reduced by 2.14 log cfu/mL at 70% ultrasound amplitude and a treatment time of 15 min. Cruz-Cansino *et al.* (2016) also reported that treatment at higher amplitude for longer period was effective in achieving microbial reduction in cactus pear juice. Overall, microbial population in sonicated sample was significantly lower than that in non-sonicated sample (control).

The polynomial regression equation for microbial load is given below:

$$\text{Microbial load} = 9.64126 + -0.11621 \times A - 0.158063 \times B + 0.001 \times AB + 0.0007725 \times A^2 + 0.00329 \times B^2,$$

where A is the amplitude and B is the time.

Table 4. Optimized combination and desirability analysis.

	Amplitude (%)	Time (min)	Total sugars (%)	Reducing sugars (%)	Non-reducing sugars (%)	Microbial load (log cfu/mL)
Predicted results	60	10	4.920	2.804	2.130	4.798
Experimental result	60	10	4.92	2.79	2.13	4.798

Optimization of ultrasonic treatment conditions

The numerical optimization was executed in the design of expert of 'version 13.0.5.0', which provided a desirability function of 0.821. The goals selected for the optimization of ultrasonic parameters for MCW were maximum values for total sugars and non-reducing sugars, and minimum values for reducing sugars and microbial load. Each independent variable (ultrasonic amplitude and treatment time) was given equal importance of '5'. Accordingly, '3' was assigned to total sugars, reducing sugars, non-reducing sugars, and microbial load based on their relative contributions to final product quality. The optimized data and results are shown in Table 4. For the ultrasonic treatment conditions for MCW to be optimal, total sugars and non-reducing sugars must reach maximum levels, while reducing sugars and microbial load must attain minimum levels. The combined optimized conditions of ultrasonic process parameters for MCW were 60% amplitude and 10 min treatment time. The response values at optimized conditions were 4.92% total sugars, 2.804% reducing sugars, 2.13% non-reducing sugars, and 4.798 log cfu/mL microbial load. The predicted results were verified by experimental test.

Conclusion

In this study, we evaluated the application of ultrasound for the preservation of MCW. The results of this study showed that ultrasonic process parameters had a significant effect on microbial population and quality of MCW. According to the current study, linear and quadratic models adequately described and predicted changes in total sugars, reducing sugars, non-reducing sugars, and microbial load as functions of independent variables (ultrasonic amplitude and treatment time). In conclusion, CCD is an effective technique for optimizing ultrasonic conditions for MCW. Based on the desirability function, optimum conditions were determined through numerical optimization. In this study, sonication treatment decreased the concentration of non-reducing sugars, total sugars and microbial population whereas increased the content of reducing sugars. It was observed that applying ultrasound at 60% amplitude for 10 min was the most effective treatment for reducing microbial population and maintaining quality parameters of MCW.

It is necessary to study and optimize the effect of other ultrasonic conditions, such as frequency and temperature, on MCW in the future studies.

References

- Aadil, R.M., Zeng, X.A., Han, Z. and Sun, D.W.J.F.C., 2013. Effect of ultrasound treatments on quality of grape fruit juice. *Food Chemistry*, 141(3): 3201–3206. <https://doi.org/10.1016/j.foodchem.2013.06.008>
- Abid, M., Jabbar, S., Wu, T., Hashim, M.H., Hu, B., Lei, S., et al. 2014. Sonication enhances polyphenolic compounds, sugars, carotenoids and mineral elements of apple juice. *Ultrasonics Sonochemistry* 21(1): 93–97. <https://doi.org/10.1016/j.ultrasonch.2013.06.002>
- Atalar, I., Gul, O., Mortas, M., Gul, L.B., Saricaoglu, F.T. and Yazici, F., 2019. Effect of thermal treatment on microbiological, physicochemical and structural properties of high pressure homogenised hazelnut beverage. *Quality Assurance and Safety of Crops & Foods* 11(6): 561–570. <https://doi.org/10.3920/QAS2018.1493>
- Aydar, A.Y., 2018. Utilization of response surface methodology in optimization of extraction of plant materials. In: Silva, V. (ed.) *Statistical approaches with emphasis on design of experiments applied to chemical processes*. IntechOpen, London, pp. 157–169. <https://doi.org/10.5772/intechopen.73690>
- Balter, S., Weiss, D., Hanson, H., Reddy, V., Das, D. and Heffernan, R., 2005. Three years of emergency department gastrointestinal syndromic surveillance in New York City: what have we found? *MMWR – Morbidity & Mortality Weekly Report Supplements* 54: 175–180.
- Baş, D. and Boyacı, I.H., 2007. Modeling and optimization I: usability of response surface methodology. *Journal of Food Engineering* 78(3): 836–845. <https://doi.org/10.1016/j.jfoodeng.2005.11.024>
- Beegum, P.P.S., Pandiselvam, R., Ramesh, S., Thube, S., Pandian, T., Khanashyam, A., Manikantan, M. and Hebbar, K., 2022. A critical appraisal on the antimicrobial, oral protective, and anti-diabetic functions of coconut and its derivatives. *Quality Assurance and Safety of Crops & Foods* 14(2): 86–100. <https://doi.org/10.15586/qas.v14i2.1040>
- Beegum, S., Ramarathinam, M., Pandiselvam, R., Manivannan, A. and Hebbar, K.B., 2018. Comparative evaluation of natural vinegar produced from mature coconut water and coconut inflorescence sap. *International Journal of Innovative Horticulture* 7(2): 123–127.

- Behera, S.K., Meena, H., Chakraborty, S. and Meikap, B.C., 2018. Application of response surface methodology (RSM) for optimization of leaching parameters for ash reduction from low-grade coal. *International Journal of Mining Science and Technology* 28(4): 621–629. <https://doi.org/10.1016/j.ijmst.2018.04.014>
- Bhat, R., Kamaruddin, N.S.B.C., Min-Tze, L. and Karim, A.J.U.S. 2011. Sonication improves kasturi lime (*Citrus microcarpa*) juice quality. *Food Chemistry* 18(6): 1295–1300. <https://doi.org/10.1016/j.ultsonch.2011.04.002>
- Burns, D.T., Johnston, E.L. and Walker, M.J., 2020. Authenticity and the potability of coconut water - a critical review. *Journal of AOAC International* 103 (3): 800–806. <https://doi.org/10.1093/jaoacint/qs008>
- Cao, X., Cai, C.F., Wang, Y. and Zheng, X., 2019. Effects of ultrasound processing on physicochemical parameters, antioxidants, and color quality of bayberry juice. *Journal of Food Quality* 2019: 1–12; Article ID 7917419. <https://doi.org/10.1155/2019/7917419>
- Chauhan, O., Archana, B., Singh, A., Raju, P. and Bawa, A., 2014. A refreshing beverage from mature coconut water blended with lemon juice. *Journal of Food Science and Technology* 51 (11):3355–3361. <https://doi.org/10.1007/s13197-012-0825-6>
- Cruz-Cansino, N., Reyes-Hernández, I., Delgado-Olivares, L., Jaramillo-Bustos, D., Ariza-Ortega, J. and Ramírez-Moreno, E., 2016. Effect of ultrasound on survival and growth of *Escherichia coli* in cactus pear juice during storage. *Brazilian Journal of Microbiology* 47(2): 431–437. <https://doi.org/10.1016/j.bjm.2016.01.014>
- de Souza Soares, A., Augusto, P.E.D., Júnior, B.R.D.C.L., Nogueira, C.A., Vieira, É.N.R., de Barros, F.A.R., et al. 2019. Ultrasound-assisted enzymatic hydrolysis of sucrose catalyzed by invertase: investigation on substrate, enzyme and kinetics parameters. *LWT – Food Science and Technology* 107: 164–170.
- Dong, S., Ma, Y., Li, Y. and Xiang, Q., 2021. Effect of dielectric barrier discharge (DBD) plasma on the activity and structural changes of horseradish peroxidase. *Quality Assurance and Safety of Crops & Foods* 13(3): 92–101. <https://doi.org/10.15586/qas.v13i3.934>
- Duarte, A.C.P., Coelho, M.A.Z. and Leite, S.G.F., 2002. Identification of peroxidase and tyrosinase in green coconut water. *Ciencia Y Tecnologia Alimentaria* 3(5): 266–270. <https://doi.org/10.1080/11358120209487737>
- Dubois, M., Gilles, K.A., Hamilton, J.K., Rubbers, P.A. and Smith F., 1956. Colorimetric method for determination of sugars and related substances. *Analytical Chemistry* 26: 350. <https://doi.org/10.1021/AC60111A017>. Corpus ID: 38872824
- Ercan, S. and Soysal, Ç., 2011. Effect of ultrasound and temperature on tomato peroxidase. *Ultrasonics Sonochemistry*, 18(2): 689–695. <https://doi.org/10.1016/j.ultsonch.2010.09.014>
- Fonteles, T., Costa, M.G.M., de Jesus, A.L.T., Miranda, M.R.A., Fernandes, F.A.N. and Rodrigues, S., 2012. Power ultrasound processing of cantaloupe melon juice: effects on quality parameters. *Food Research International* 48: 41–48. <https://doi.org/10.1016/j.foodres.2012.02.013>
- Gavahian, M., Meng-Jen, T. and Khaneghah, A.M., 2020. Emerging techniques in food science: the resistance of chlorpyrifos pesticide pollution against arc and dielectric barrier discharge plasma. *Quality Assurance and Safety of Crops & Foods* 12(SP1): 9–17. <https://doi.org/10.15586/qas.v12iSP1.807>
- Haseena, M., Kasturi Bai, K.V. and Padmanabhan, S., 2010. Post-harvest quality and shelf-life of tender coconut. *Journal of Food Science & Technology*, 47(6): 686–689. <https://doi.org/10.1007/s13197-010-0097-y>
- Jabbar, S., Abid, M., Hu, B., Wu, T., Hashim, M.S., Shicheng, L., et al. 2014. Quality of carrot juice as influenced by blanching and sonication treatments. *LWT – Food Science and Technology* 55: 16–21. <https://doi.org/10.1016/j.lwt.2013.09.007>
- Jackson, J., Gordon, A., Wizard, G., McCook, K. and Rolle, R., 2004. Changes in chemical composition of coconut (*Cocos nucifera*) water during maturation of the fruit. *Journal of Science of Food and Agriculture* 84(9): 1049–1052. <https://doi.org/10.1002/jsfa.1783>
- Jiang, Q., Zhang, M. and Xu, B., 2020. Application of ultrasonic technology in postharvested fruits and vegetables storage: a review. *Ultrasonics Sonochemistry* 69: 105261. <https://doi.org/10.1016/j.ultsonch.2020.105261>
- Kailaku, S.I., Syah, A.N.A., Risfaheri, R., Setiawan, B., Sulaeman, A., 2015. Carbohydrate-electrolyte characteristics of coconut water from different varieties and its potential as natural isotonic drink. *International Journal on Advanced Science, Engineering and Information Technology* 3: 174–177. <https://doi.org/10.18517/ijaseit.5.3.515>
- Kenari, R.E. and Belgheisi, S., 2019. Improving the qualitative indicators of apple juice by *Chitosan* and ultrasound. *Journal of Food Science and Nutrition* 7(4): 1214–1221. <https://doi.org/10.1002/fsn3.925>
- Kongruang, S. and Kleesuwan, S., 2020. Nutritional quantification and shelf life analysis of non-thermal processed coconut juice. *E3S Web of Conferences* 141: 02008. <https://doi.org/10.1051/e3sconf/202014102008>
- Moosavi, M., Khaneghah, A.M., Javanmardi, F., Hadidi, M., Hadian, Z., Jafarzadeh, S., et al. 2021. A review of recent advances in the decontamination of mycotoxin and inactivation of fungi by ultrasound. *Ultrasonics Sonochemistry* 79: 105755. <https://doi.org/10.1016/j.ultsonch.2021.105755>
- Mousavi Khaneghah, A., 2021. New emerging techniques in combination with conventional methods in improving the quality, safety, and nutrient values of food products. *Quality Assurance and Safety of Crops & Foods* 13(SP1): 12–13. <https://doi.org/10.1016/j.foodres.2021.110799>
- Nwabueze, T.U., 2010. Basic steps in adapting response surface methodology as mathematical modelling for bioprocess optimisation in the food system. *International Journal of Food Science and Technology* 45(9): 1768–1776. <https://doi.org/10.1111/j.1365-2621.2010.02256.x>
- Pandiselvam, R., Manikantan, M.R., Subhashree, N., Mathew, A.C., Balasubramanian, D., Shameena Beegum, P.P., et al. 2019. Correlation and principal component analysis of physical properties of tender coconut (*Cocos nucifera* L.) in relation to the development of trimming machine. *Journal of Food Process Engineering* 42(6): e13217. <https://doi.org/10.1111/jfpe.13217>
- Pandiselvam, R., Prithviraj, V., Manikantan, M.R., Beegum, P.S., Ramesh, S.V., Padmanabhan, S., et al. 2022. Central composite

- design, Pareto analysis, and artificial neural network for modeling of microwave processing parameters for tender coconut water. *Measurement: Food* 5: 100015. <https://doi.org/10.1016/j.measfoo.2021.100015>
- Pratheepa, V. and Kamalanathan, G., 2020. Effect of ultrasonication on microbial, chemical and sensory properties of juices and its kinetic aspects: a review. *International Journal of ChemTech Research* 13: 90–97. <https://doi.org/10.20902/IJCTR.2019.130111>.
- Prithviraj, V., Pandiselvam, R., Babu, A.C., Kothakota, A., Manikantan, M.R., Ramesh, S. V., et al. 2021. Emerging non-thermal processing techniques for preservation of tender coconut water. *LWT – Food Science and Technology* 149: 111850. <https://doi.org/10.1016/j.lwt.2021.111850>
- Purkayastha, M.D., Kalita, D., Mahnot, N., Mahanta, C., Mandal, M. and Chaudhuri, M.K., 2012. Effect of L-ascorbic acid addition on the quality attributes of micro-filtered coconut water stored at 4°C. *Innovative Food Science & Emerging Technologies* 16: 69–79. <https://doi.org/10.1016/j.ifset.2012.04.007>
- Ranganna, S. 1986. *Handbook of analysis and quality control for fruit and vegetables*. Tata McGraw-Hill, New Delhi, India, pp. 16–18.
- Rostagno, M.A., Palma, M. and Barroso, C.G., 2003. Ultrasound-assisted extraction of soy isoflavones. *Journal of Chromatography A*, 1012: 119–128. [https://doi.org/10.1016/s0021-9673\(03\)01184-1](https://doi.org/10.1016/s0021-9673(03)01184-1)
- Saeeduddin, M., Abid, M., Jabbar, S., Wu, T., Hashim, M.M., Awad, F.N., et al., 2015. Quality assessment of pear juice under ultrasound and commercial pasteurization processing conditions. *LWT – Food Science And Technology* 64(1): 452–458. <https://doi.org/10.1016/j.lwt.2015.05.005>
- Sevda, S., Singh, A., Joshi, C. and Rodrigues, L., 2012. Extraction and optimization of guava juice by using response surface methodology. *American Journal of Food Technology* 7: 326–339. <https://doi.org/10.3923/ajft.2012.326.339>
- Starek, A., Kobus, Z., Sagan, A., Chudzik, B., Pawlat, J., Kwiatkowski, M., et al. 2021. Influence of ultrasound on selected microorganisms, chemical and structural changes in fresh tomato juice. *Scientific Reports* 11(1): 3488. <https://doi.org/10.1038/s41598-021-83073-8>
- Subramanian, P., Thamban, C., Hegde, V., Hebbar, K.B., Bhat, R., Krishnakumar, V., et al. 2018. Coconut. *Technical Bulletin* No. 133: 56. (ICAR-CPCRI, Kasaragod, Kerala, India)
- Sunil, L., Appaiah, P., Prasanth Kumar, P.K. and Gopala Krishna, A.G., 2020. Coconut water—a nature's miracle health drink: chemistry, health benefits, packaging, storage, and technologies: a review. *Indian Coconut Journal*, 1: 17–25. <http://ir.cftri.res.in/id/eprint/14782>
- Vivek, K., Subbarao, K.V. and Srivastava, B.J.U.S., 2016. Optimization of postharvest ultrasonic treatment of kiwi fruit using RSM. *Ultrasonics Sonochemistry*, 32: 328–335. <https://doi.org/10.1016/j.ultsonch.2016.03.029>
- Witek-Krowiak, A., Chojnacka, K., Podstawczyk, D., Dawiec, A. and Pokomeda, K., 2014. Application of response surface methodology and artificial neural network methods in modelling and optimization of biosorption process. *Bioresource Technology* 160: 150–160. <https://doi.org/10.1016/j.biortech.2014.01.021>
- Xu, H.R., Zhang, Y.Q., Wang, S., Wang, W.D., Yu, N.N., Gong, H., et al. 2022. Optimization of functional compounds extraction from Ginkgo biloba seeds using response surface methodology. *Quality Assurance and Safety of Crops & Foods* 14(1): 102–112. <https://doi.org/10.15586/qas.v14i1.1033>
- Yong, J.W., Ge, L., Ng, Y.F. and Tan, S.N., 2009. The chemical composition and biological properties of coconut (*Cocos Nucifera* L.) water. *Molecules* 14(12): 5144–5151. <https://doi.org/10.3390/molecules14125144>
- Yuan, Y., Hu, Y., Yue, T., Chen, T. and Lo, Y.M., 2009. Effect of ultrasonic treatments on thermoacidophilic *Alicyclobacillus acidoterrestris* in apple juice. *Journal of Food Processing and Preservation* 33 (3):370-383. <https://doi.org/10.1111/j.1745-4549.2009.00407.x>
- Zou, Y. and A, Jiang., 2016. Effect of ultrasound on quality and microbial load of carrot juice. *Food Science Technology (Campinas)* 36: 111–115. <https://doi.org/10.1590/1678-457X.0061>